
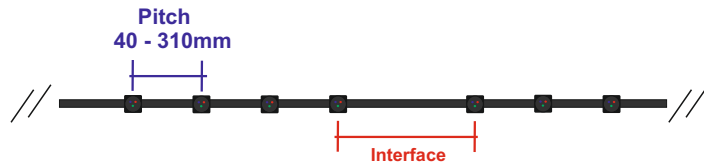
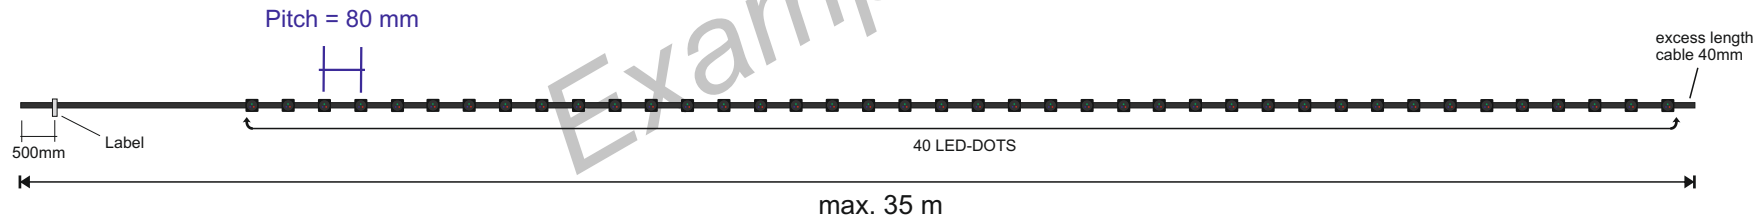


X-LED LINE 7.5 / Customized

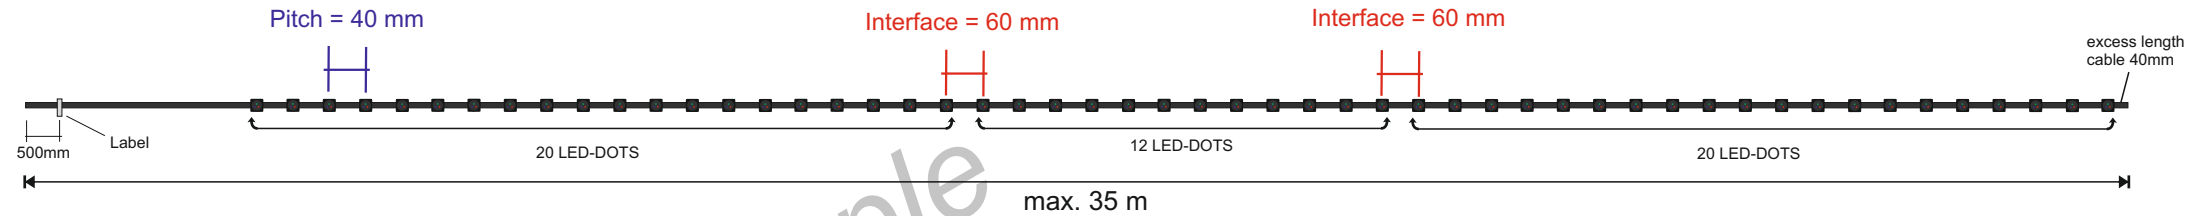

Pitch = general distance in mm from center to center of the LED-DOT (max. 56 LED-DOTS)

Interface = special distance in mm from center to center of the LED-DOT

Farbauflösung Color definition	14 bit nativ
Steuerungsprotokolle Control	DMX
Betriebsspannung Power requirement	12 VDC
Leistungsaufnahme (unter Vollast) Power consumption (under full load)	max. 0,95 W
Abstrahlwinkel Angle of radiation	40° x 100°
Lichtstärke Light intensity	7,5 cd
Abmessungen der einzelnen LED in mm Dimension per LED in mm	24 x 24 x 15 (B x H x T) 24 x 24 x 15 (W x H x D)
Schutzgrad Protection rating	IP 65
Umgebungstemperatur Environmental temperature	-20°C - +50°C



Carl Stahl GmbH
Tobelstrasse 2
D-73079 Süssen
info@x-led-mesh.com
www.x-led-mesh.com